



Job: _____ Item No. _____
 Notes: _____
 Model Number: PUCA-24S PUCA-14S

Ambient Smart Order Slimline Cabinets

SPECIFICATIONS



PUCA-24S shown (center)
 with two PUCA-14SAO add on units (left and right ends)
 and clear doors

DESCRIPTION

Carter-Hoffmann PUC Smart Order Pick-Up cabinets are designed for automated pick-up, carry-out and drop-off, including 3rd party delivery. Available in front-loading and pass-through. Add-on cabinets can be connected to a master cabinet for flexible capacity. Cabinets are connected via Ethernet to generate an order QR code. They can operate stand-alone or be integrated with sales and online software for seamless function and data analytics.

SHORT FORM SPECIFICATIONS

Carter-Hoffmann floor standing ambient PUC Smart Order Cabinet. Internet enabled order fulfillment with capacitive touchscreen and QR code scanner, two Ethernet jacks; Ethernet connection required (customer provided). Software includes order management, customer notification and cleaning cycle notification. Pop-latch, auto-open, manual close doors. Stainless steel construction with powder-coated doors. 14”H x 12”W x 14”D compartments with product sensors and interior lighting. 120 volts, 0.75-1.0A, 60 Hz, single phase, six foot rubber cord with 3 prong grounding plug. NEMA 5-15P plug.

FEATURES

- Capacitive touchscreen tablet with QR code scanner
 one tablet on PUCA-24S front-access
 two tablets on PUCA-24S-PT pass-through
- Tablet can be located on the right, left or in the center of the cabinet
- 14”H x 12”W x 14”D compartments with product sensors and interior lighting
- Clear pop-latch, auto-open doors; manual close
- Stainless steel construction; doors feature gray powder coating
- Front loading cabinets have stainless steel back
- Add-ons can be connected to a master for additional cubbies (45 total, including master cabinet)
- Software includes order management, programmable alarm for dwell time, customer notification and cleaning cycle notification
- Two Ethernet jacks for network connection and optional add-on cabinets
- Ethernet connection required (customer provided)

OPTIONS AND ACCESSORIES

- Integration of software to existing POS system
- Custom colors and/or logos for large orders
- See matrix on page 3 for all available configurations

CERTIFICATIONS



WARRANTY

PUC cabinets come with a one year warranty for parts and labor.



CARTER-HOFFMANN

1551 McCormick Ave., Mundelein, IL 60060

847.362.5500 800.323.9793

www.carter-hoffmann.com

Follow Us



Form PUCA-S






Job: _____ Item No. _____
 Notes: _____
 Model Number: PUCA-24S PUCA-14S

Ambient Smart Order Slimline Cabinets

SPECIFICATIONS


Front

Side

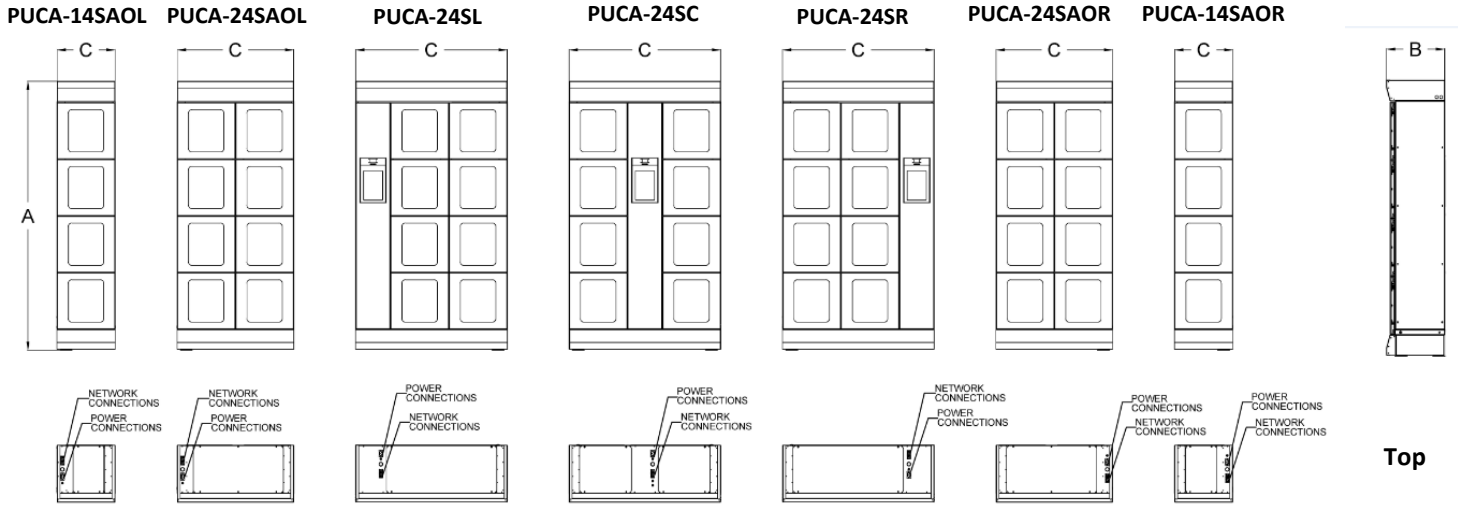

ELECTRICAL DATA

Single electrical connection: NEMA 5-15P plug
 PUCA-14S: 120volts, 0.75A, 60Hz, 1Ph
 PUCA-24S: 120volts, 1.0A, 60Hz, 1Ph



Base Model Number	Cabinet Style	Number of Cubbies	Loading Style	Height [A]		Depth [B]		Width [C]		Weight	
				in	mm	in	mm	in	mm	lbs	kg
PUCA-24S	Master	8	Front-Load	78 ¹ / ₂	1994	16 ⁵ / ₈	422	44 ¹ / ₄	1124	310	141
PUCA-24SAO*	Add-on	8	Front-Load	78 ¹ / ₂	1994	16 ⁵ / ₈	422	34 ¹ / ₈	867	310	141
PUCA-14SAO*	Add-on	4	Front-Load	78 ¹ / ₂	1994	16 ⁵ / ₈	422	17 ¹ / ₈	435	310	141

*Add-on cabinets require connection to master cabinet for control interface.

Due to periodic changes in designs, methods, procedures, policies and regulations, the specifications contained in this sheet are subject to change without notice. While Carter-Hoffmann exercises good faith efforts to provide information that is accurate, we are not responsible for errors or omissions in information provided or conclusions reached as a result of using these specifications. By using the information provided, the user assumes all risks in connection with such use.



Job: _____ Item No. _____
 Notes: _____
 Model Number: PUCA-24S PUCA-14S

Ambient Smart Order Slimline Cabinets

SPECIFICATIONS

Model Matrix

PUC cabinets are available in a number of configurations. The matrix below defines each configuration.

S = slimline
C = center controls
L = left (left side controls or left side add-on)
R = right (right side controls or right side add-on)

AO = add on
PT = pass thru
I = international voltage (specify country)

Model Number	Cabinet Style	Number of Cubbies	Controls in Center	Controls on Left Side	Controls on Right Side	*Add-On Cabinet	Pass Through	Add-On Location to Master	International Voltage
PUCA-24SC	Master	8	X						
PUCA-24SL	Master	8		X					
PUCA-24SR	Master	8			X				
PUCA-24SC-PT	Master	8	X				X		
PUCA-24SL-PT	Master	8		X			X		
PUCA-24SR-PT	Master	8			X		X		
PUCA-14SAOL	Add-On	4				X		Left	
PUCA-14SAOR	Add-On	4				X		Right	
PUCA-14SAOL-PT	Add-On	4				X	X	Left	
PUCA-14SAOR-PT	Add-On	4				X		Right	
PUCA-24SAOL	Add-On	8				X		Left	
PUCA-24SAOR	Add-On	8				X		Right	
PUCA-24SAOL-PT	Add-On	8				X	X	Left	
PUCA-24SAOR-PT	Add-On	8				X	X	Right	
PUCA-24SC-I	Master	8	X						X
PUCA-24SL-I	Master	8		X					X
PUCA-24SR-I	Master	8			X				X
PUCA-24SC-PTI	Master	8	X				X		X
PUCA-24SL-PTI	Master	8		X			X		X
PUCA-24SR-PTI	Master	8			X		X		X
PUCA-14SAOL-I	Add-On	4				X		Left	X
PUCA-14SAOR-I	Add-On	4				X		Right	X
PUCA-14SAOL-PTI	Add-On	4				X	X	Left	X
PUCA-14SAOR-PTI	Add-On	4				X		Right	X
PUCA-24SAOL-I	Add-On	8				X		Left	X
PUCA-24SAOR-I	Add-On	8				X		Right	X
PUCA-24SAOL-PTI	Add-On	8				X	X	Left	X
PUCA-24SAOR-PTI	Add-On	8				X	X	Right	X

CARTER-HOFFMANN

1551 McCormick Ave., Mundelein, IL 60060
 Phone 800.323.9793 • Fax 847.367.8981
 www.carter-hoffmann.com

Printed in the USA • PUCA-S • Rev. D • 01.2023
 Specifications are subject to change without notice and are not intended for installation purposes.