



Job: _____ Item No. _____
 Notes: _____
 Model Number: PUCH-24S PUCH-14S

Heated Smart Order Slimline Cabinets

SPECIFICATIONS



PUCH-24S shown (center)
 with two PUCH-14SAO add on units (left and right ends)
 and clear doors

DESCRIPTION

Carter-Hoffmann PUC Smart Order Pick-Up cabinets are designed for automated pick-up, carry-out and drop-off, including 3rd party delivery. Available in front-loading and pass-through. Add-on cabinets can be connected to a master cabinet for flexible capacity. Cabinets are connected via Ethernet to generate an order QR code. They can operate stand-alone or be integrated with sales and online software for seamless function and data analytics.

SHORT FORM SPECIFICATIONS

Carter-Hoffmann floor standing heated PUC Smart Order Cabinet. Internet enabled order fulfillment with capacitive touchscreen and QR code scanner, two Ethernet jacks; Ethernet connection required (customer provided). Software includes order management, customer notification and cleaning cycle notification. Pop-latch, auto-open, manual close doors. Stainless steel construction with powder-coated doors. 14”H x 12”W x 14”D compartments with product sensors and interior lighting. 120 volts, 8.0 - 16A, 60 Hz, single phase, six foot rubber cord with 3 prong grounding plug.

FEATURES

- Capacitive touchscreen tablet with QR code scanner
 one tablet on PUCH-24S front-access
 two tablets on PUCH-24S-PT pass-through
- Tablet can be located on the right, left or in the center of the cabinet
- 14”H x 12”W x 14”D compartments with product sensors and interior lighting
- Heated lockers: programmable temperature up to 176°F; can be turned off for ambient holding
- Clear pop-latch, auto-open doors; manual close
- Stainless steel construction; doors feature gray powder coating
- Front loading cabinets have stainless steel back
- Add-ons can be connected to a master for an additional cubbies (45 total, including master cabinet)
- Software includes order management, programmable alarm for dwell time, customer notification and cleaning cycle notification
- Two Ethernet jacks for network connection and optional add-on cabinets
- Ethernet connection required (customer provided)

OPTIONS AND ACCESSORIES

- Integration of software to existing POS system
- Custom colors and/or logos for large orders
- See matrix on page 3 for all available configurations

CERTIFICATIONS



WARRANTY

PUC cabinets come with a one year warranty for parts and labor.



CARTER-HOFFMANN

1551 McCormick Ave., Mundelein, IL 60060

847.362.5500 800.323.9793

www.carter-hoffmann.com

Follow Us



Form PUCH-S





Job: _____ Item No. _____

Notes:


Model Number: PUCH-24S PUCH-14S

Heated Smart Order Slimline Cabinets

SPECIFICATIONS

Front

Side

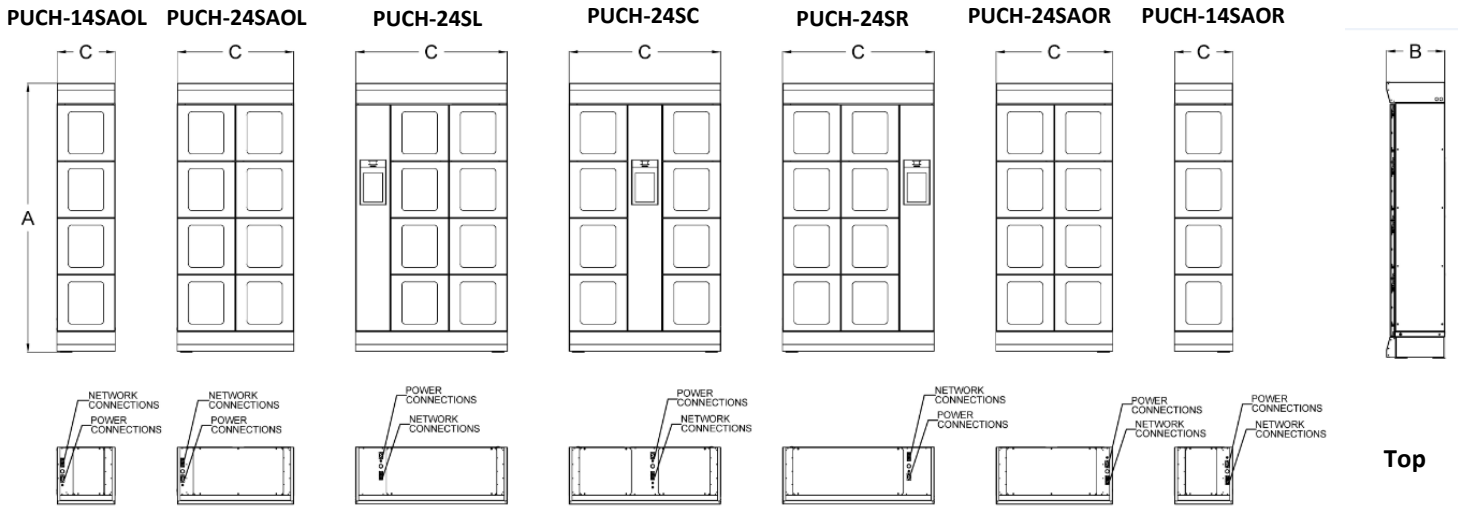


ELECTRICAL DATA


Single electrical connection:

PUCH-14S: 120volts, 8.0A, 60Hz, 1Ph, NEMA 5-15P plug

PUCH-24S: 120volts, 16.0A, 60Hz, 1Ph, NEMA 5-20P plug



NEMA 5-15P



NEMA 5-20P

| Base Model Number | Cabinet Style | Number of Cubbies | Loading Style | Height [A] | | Depth [B] | | Width [C] | | Weight | |
|-------------------|---------------|-------------------|---------------|--------------------------------|------|--------------------------------|-----|--------------------------------|------|--------|-----|
| | | | | in | mm | in | mm | in | mm | lbs | kg |
| PUCH-24S | Master | 8 | Front-Load | 78 ¹ / ₂ | 1994 | 16 ⁵ / ₈ | 422 | 44 ¹ / ₄ | 1124 | 310 | 141 |
| PUCH-24SAO* | Add-on | 8 | Front-Load | 78 ¹ / ₂ | 1994 | 16 ⁵ / ₈ | 422 | 34 ¹ / ₈ | 867 | 310 | 141 |
| PUCH-14SAO* | Add-on | 4 | Front-Load | 78 ¹ / ₂ | 1994 | 16 ⁵ / ₈ | 422 | 17 ¹ / ₈ | 435 | 310 | 141 |

*Add-on cabinets require connection to master cabinet for control interface.

Due to periodic changes in designs, methods, procedures, policies and regulations, the specifications contained in this sheet are subject to change without notice. While Carter-Hoffmann exercises good faith efforts to provide information that is accurate, we are not responsible for errors or omissions in information provided or conclusions reached as a result of using these specifications. By using the information provided, the user assumes all risks in connection with such use.



Job: _____ Item No. _____
 Notes: _____
 Model Number: PUCH-24S PUCH-14S

Heated Smart Order Slimline Cabinets

SPECIFICATIONS

Model Matrix

PUC cabinets are available in a number of configurations. The matrix below defines each configuration.

S = slimline
C = center controls
L = left (left side controls or left side add-on)
R = right (right side controls or right side add-on)

AO = add on
PT = pass thru
I = international voltage (specify country)

| Model Number | Cabinet Style | Number of Cubbies | Controls in Center | Controls on Left Side | Controls on Right Side | *Add-On Cabinet | Pass Through | Add-On Location to Master | International Voltage |
|-----------------|---------------|-------------------|--------------------|-----------------------|------------------------|-----------------|--------------|---------------------------|-----------------------|
| PUCH-24SC | Master | 8 | X | | | | | | |
| PUCH-24SL | Master | 8 | | X | | | | | |
| PUCH-24SR | Master | 8 | | | X | | | | |
| PUCH-24SC-PT | Master | 8 | X | | | | X | | |
| PUCH-24SL-PT | Master | 8 | | X | | | X | | |
| PUCH-24SR-PT | Master | 8 | | | X | | X | | |
| PUCH-14SAOL | Add-On | 4 | | | | X | | Left | |
| PUCH-14SAOR | Add-On | 4 | | | | X | | Right | |
| PUCH-14SAOL-PT | Add-On | 4 | | | | X | X | Left | |
| PUCH-14SAOR-PT | Add-On | 4 | | | | X | | Right | |
| PUCH-24SAOL | Add-On | 8 | | | | X | | Left | |
| PUCH-24SAOR | Add-On | 8 | | | | X | | Right | |
| PUCH-24SAOL-PT | Add-On | 8 | | | | X | X | Left | |
| PUCH-24SAOR-PT | Add-On | 8 | | | | X | X | Right | |
| PUCH-24SC-I | Master | 8 | X | | | | | | X |
| PUCH-24SL-I | Master | 8 | | X | | | | | X |
| PUCH-24SR-I | Master | 8 | | | X | | | | X |
| PUCH-24SC-PTI | Master | 8 | X | | | | X | | X |
| PUCH-24SL-PTI | Master | 8 | | X | | | X | | X |
| PUCH-24SR-PTI | Master | 8 | | | X | | X | | X |
| PUCH-14SAOL-I | Add-On | 4 | | | | X | | Left | X |
| PUCH-14SAOR-I | Add-On | 4 | | | | X | | Right | X |
| PUCH-14SAOL-PTI | Add-On | 4 | | | | X | X | Left | X |
| PUCH-14SAOR-PTI | Add-On | 4 | | | | X | | Right | X |
| PUCH-24SAOL-I | Add-On | 8 | | | | X | | Left | X |
| PUCH-24SAOR-I | Add-On | 8 | | | | X | | Right | X |
| PUCH-24SAOL-PTI | Add-On | 8 | | | | X | X | Left | X |
| PUCH-24SAOR-PTI | Add-On | 8 | | | | X | X | Right | X |

CARTER-HOFFMANN

1551 McCormick Ave., Mundelein, IL 60060
 Phone 800.323.9793 • Fax 847.367.8981
 www.carter-hoffmann.com

Printed in the USA • PUCH-S • Rev. E • 01.2023
 Specifications are subject to change without notice and are not intended for installation purposes.